

# Passive Glasses

## Laser Cavity Materials


### S7010N, S7005 and S7000

S7000 is a clear, cerium-doped silicate glass used as a laser cavity material. It is also available to serve as a UV cut-off material. S7005 is a laser cavity material with 5% doping of samarium oxide. This material is usually thicker than 6mm. S7010N is a laser cavity material with 10% doping of samarium oxide. This glass is recommended for most applications. SCHOTT offers a complete line of commercial filter glasses and can produce with a full range of doping levels for specific applications.

## Property Sheet for S7005

Optical Properties	
$n_d$	1.562
$v_d$	55.0
$n_{1054nm}$	1.560
$n_{1540m}$	1.551
UV Cut-off at 10% Transmission, Thickness of 5mm [nm]	360±5
Absorption Coefficient at 1060nm [cm <sup>-1</sup> ]	1.2±0.1
Optical Density at 1064nm [cm <sup>-1</sup> ]	0.56±0.10

S-7005 Transmission Curve  
Sample Thickness 5mm

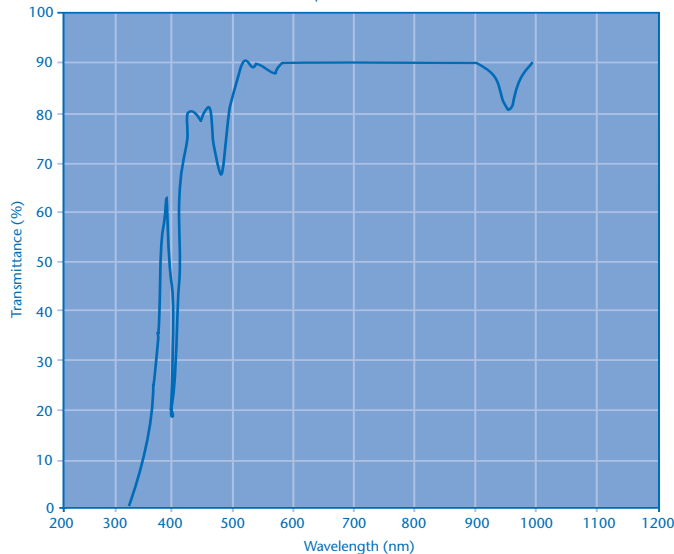

For more information please contact:

Advanced Optics  
**SCHOTT North America, Inc.**  
 400 York Avenue  
 Duryea, PA 18642  
 USA

Phone: +1 (0) 570/457-7485  
 Fax: +1 (0) 570/457-7330  
 info.optics@us.schott.com  
 www.us.schott.com/advanced\_optics

Physical Properties	
Density, $\rho$ [g/cm <sup>3</sup> ]	2.88
Thermal Conductivity (25°C), $K$ [W/m•K]	0.77
Thermal Conductivity (90°C), $K$ [W/m•K]	0.92
Young's Modulus, $E$ [GPa]	78
Poisson's Ratio, $\nu$	0.247
Thermal Expansion, $\alpha_{20-300^\circ C}$ [10 <sup>-7</sup> /°C]	115
Transformation Temperature, $T_g$ [°C]	452
Softening Point (10 <sup>7.6</sup> poise) [°C]	594

Chemical Properties	
Weight Loss in 50°C Water [mg/(cm <sup>2</sup> •day)]	0.180
Acid Resistance SR pH=0.3 at 25°C	1.2
Alkali Resistance AR pH=12 at 50°C	1.0
Staining Resistance FR pH=4.6 100h at 25°C	1
Climatic Resistance CR Water Vapor at 40-50°C for 30 h	1-2
Samarium Content [wt% Sm <sub>2</sub> O <sub>3</sub> ]	5

**SCHOTT**  
 glass made of ideas