


Broadband Infrared Ceramics for Harsh Environments

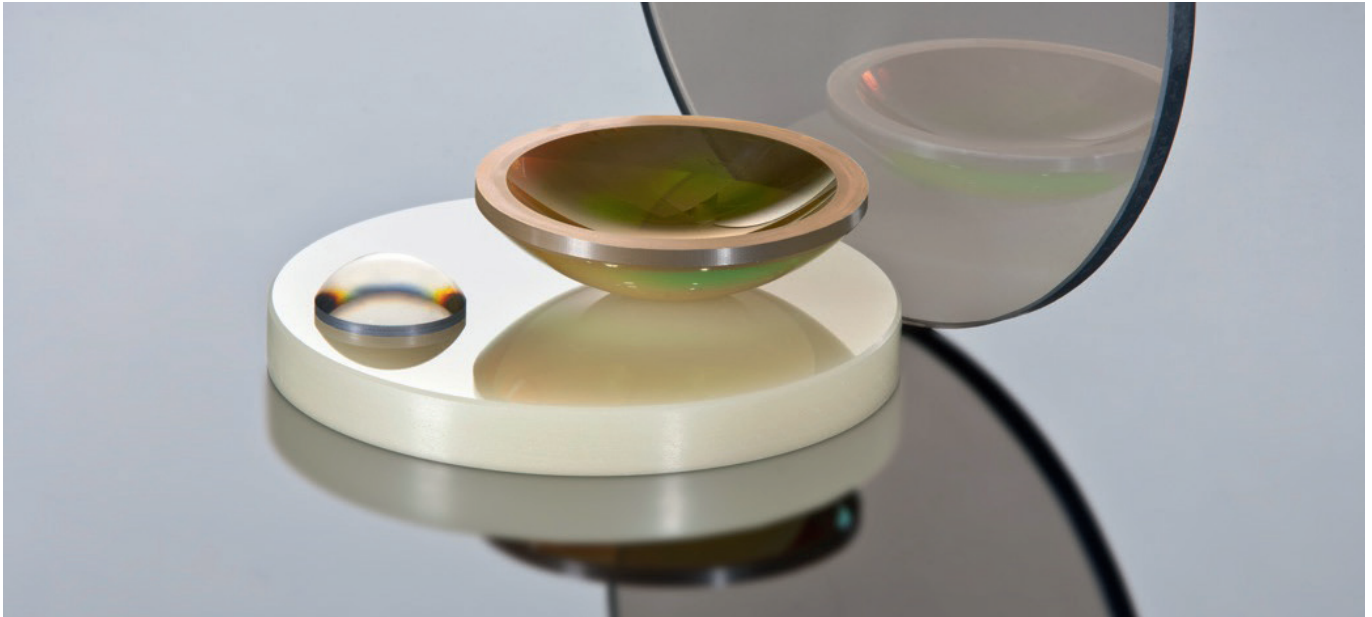

Product Information

Zinc Sulfide is the most suitable material for broadband infrared windows, domes and optics. No other material offers this combination of optical properties and environmental resistance. SCHOTT has developed a ceramic process to produce polycrystalline Zinc Sulfide, IRC-1. IRC-1 has significantly improved optical and mechanical performance compared to CVD processed material.

IRC-1 is the material of choice for mid and long wave IR applications

Advantages

- IRC-1 performs with high transmission between 3–12 μm
- Fine grained and homogenous microstructures
 - Higher Strength and Hardness
 - Lower cost finishing
 - Improved results from deterministic finishing
- Ceramic process allows the production of near net shape dome blanks and curved window blanks
 - Reduces processing time and associated costs
 - Reduces production complexity

Forms of Supply

SCHOTT offers various shapes from round to square with ground, standard or fine polished surfaces.

- Flat blanks can be supplied up to \varnothing 125 mm and from 0.5 to 15 mm thickness
- Dome blanks and curved windows: Up to 100 mm in diameter

Sample Parts

For sample parts we would like to offer you the following sample sizes:

- Diameter: 25 mm with a thickness of 2 mm
- Diameter: 50 mm with a thickness of 2 mm

Applications

Thermal Imaging Systems

- Thermography
- Predictive Maintenance
- Automotive Safety Systems
- Vandal Proof Surveillance and Imaging
- Force Protection
- Intrinsically Safe IR Imaging Systems

Machine Vision systems

- Process Control
- Robotic Manufacturing
- UAV Imaging

Broadband Infrared Ceramics for Harsh Environments


Preliminary Data Sheet

Optical Properties		
Wavelength, Microns	Refractive Index @ 20°C	dn/dT, 10 ⁻⁶ /K
0.441	2.482	
0.639	2.348	
0.947	2.297	
1	2.292	50
2	2.264	47
3	2.257	46
4	2.252	46
5	2.246	46
6	2.239	46
7	2.232	45
8	2.223	45
9	2.212	45
10	2.200	45
11	2.186	45
12	2.170	45
13	2.152	45
14	2.130	

Thermal Properties	
Thermal Conductivity @ 20°C, W/m/K	16.70
Specific Heat, J/g/K	0.47
Thermal Expansion (-40°C to 70°C) x 10 ⁻⁶ , K ⁻¹	5.90

Mechanical Properties	
Rupture Modulus MPa	120
Young's Modulus GPa	74
Poisson's Ratio	0.27
Hardness (Knoop) kg/mm ²	270–310
Density g/cc	4.08

Transmission (typical curves)

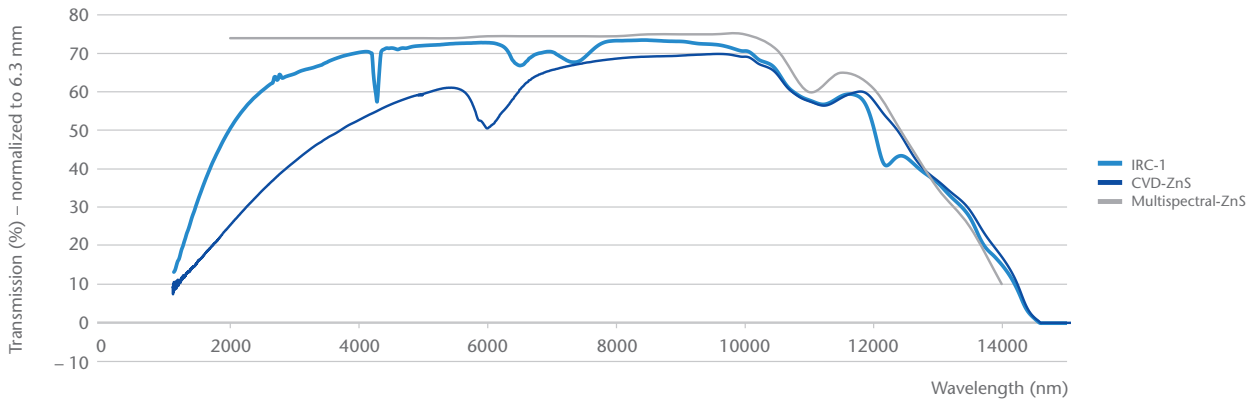

Advanced Optics
 SCHOTT North America, Inc.
 400 York Avenue
 Duryea, PA 18642
 USA
 Phone +1 570/457-7485
 Fax +1 570/457-7330
 info.optics@us.schott.com

www.us.schott.com/advanced_optics

