


# SCHOTT Premium Reading Light

**SCHOTT® Cirrus** - fiber optic flex-and-stay Reading Light

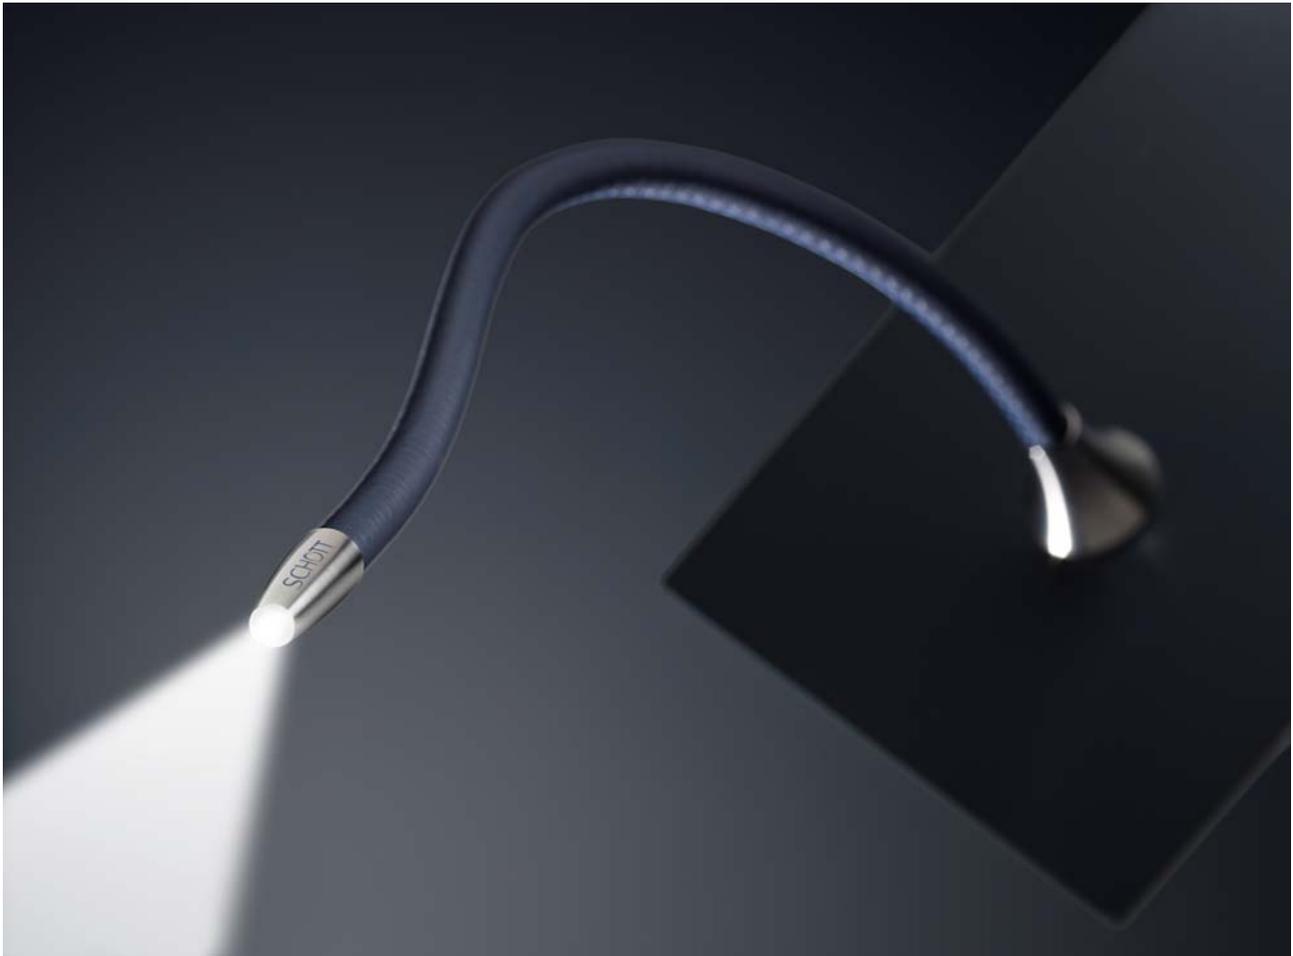

## Product Characteristics

The SCHOTT® Cirrus Reading Light is a fiber optic Reading Light solution with an elegant and slim design. The light guide transports the light from the light engine to the seat or any monument within the cabin and overcomes the space and heat problem by placing the light engine on a spot where there is sufficient space.

This high class design of SCHOTT® Cirrus gives every cabin an elegant touch.

The greatest advantage of such a system is the pure mechanical attributes with no electrical wiring to the panels. SCHOTT® Cirrus is compliant with FAR 25-853, ABD0031 regarding flammability, smoke and toxicity.

## Technical Specifications

Outer flex and stay diameter (incl. leather)	8 mm	10 mm
Fiber diameter	70 µm	70 µm
Active bundle diameter	2,5 mm	3,5 mm
Minimum bending radius	35 mm	45 mm
Max. length	300 mm	400 mm
Typical weight for max. length	105 g/m	155 g/m

## Product Advantages

Elegant and slim design

Customized design

Excellent light color characteristics and transmission

Pure mechanical attributes with no electrical wiring

## Associated Products

LED Light Source SCHOTT® HelioBasic

### For more information please contact:

#### Aviation

SCHOTT AG

Otto-Schott-Str. 2

55127 Mainz

Germany

Phone: +49 (0)6131/660

Fax: +49 (0)6131/667850

E-mail: [info.aviation@schott.com](mailto:info.aviation@schott.com)

[www.schott.com/aviation](http://www.schott.com/aviation)

**SCHOTT**  
glass made of ideas

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT.  
© SCHOTT AG