

SCHOTT MIROGARD® Protect Ultra – Lightweight, Premium UV & Splinter Protection and very thin

Museums, collections and galleries all over the world have been relying on SCHOTT MIROGARD® for decades. The optical interference coated, anti-reflective glass protects precious artworks without detracting from the viewing enjoyment.

More protection than other picture framing glasses

The laminated glass SCHOTT MIROGARD® Protect Ultra protects high-quality paintings, graphics and prints extremely well against the destructive effects of UV radiation. 99.9% of the damaging UV radiation in the 300 to 380 nm wavelength is absorbed and reflected.

In addition, the laminated glass MIROGARD® Protect Ultra offers the best possible splinter protection.

Brilliant rendering of color without any annoying reflections


The high-quality anti-reflective coating with less than 1 % residual reflection allows for undisturbed viewing of artworks. MIROGARD® Protect Ultra guarantees genuine colors with a general color rendering index of $R_a = 100$.

Safe and easy handling thanks to its light weight

Due to the composite film we use, MIROGARD® Protect Ultra remains extremely mechanical stable, yet is light in weight. One m² weighs only 6.5 kg.

Easy integration into existing frame solutions

Because it is only 2.95 mm thick, MIROGARD® Protect Ultra can easily be used in existing standard picture framing solutions.

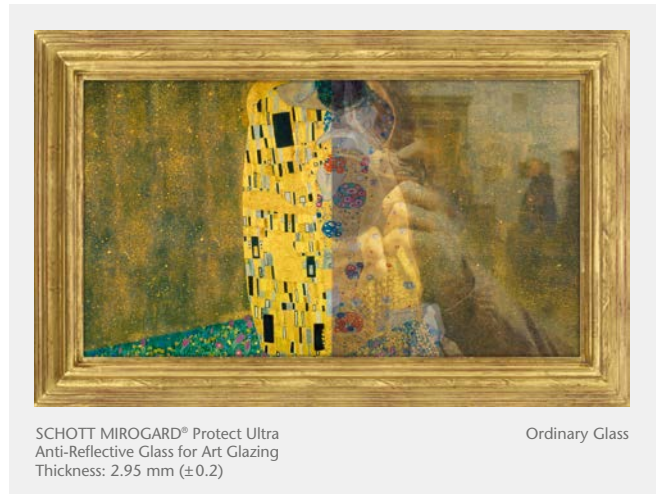


Applications for picture glazing

- Museums
- High-quality art collections
- Galleries
- For ensured loans to exhibitions

Benefits

- Anti-reflective coating
- Low specific weight
- Best possible color rendering
- Outstanding UV protection
- Splinter protection
- High mechanical stability

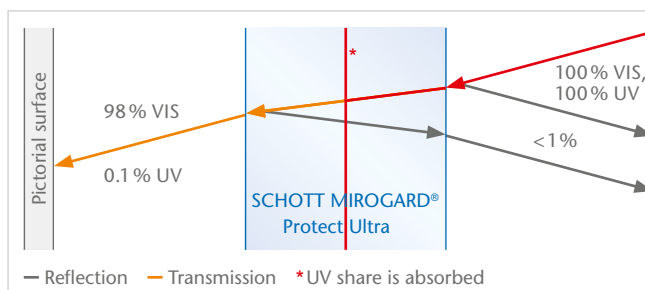

MIROGARD® Protect Ultra absorbs almost 100% of harmful UV light. Nevertheless, it still transmits nearly 100% of the visible light, with no annoying reflections and with the acknowledged excellent $R_a = 100$ color rendering index of SCHOTT MIROGARD®.

Specification MIROGARD® Protect Ultra

Glass thickness 2.95 mm (±0.2 mm)

Available in sizes up to 1,770 mm x 1,220 mm

Visual reflectance	< 1 %
Luminous transmittance	98 %
General color rendering index	$R_a = 100$
UV protection (300–380 nm)	99.9 %
Mechanical protection	splinter protection

SCHOTT North America, Inc.
555 Taxter Road
Elmsford, NY 10523
USA
Phone +1 (914) 831-2240
info.architecture@us.schott.com

SCHOTT
glass made of ideas